


High Pressure Pumps Streamline™ S-30 and *NEW, More Powerful S-50*

Designed for Custom System Integration

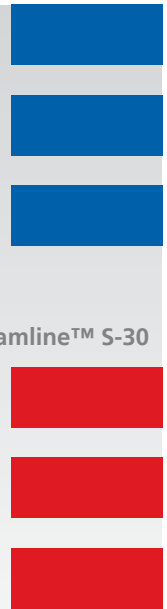

KMT Waterjet brings you an intensifier manufactured for complete system integration. The S-30 & S-50 intensifiers are designed for the user that prefers to design and build the pump control logic, including shutdown due to overstroking, overheating, loss of water pressure and all other aspects of pump control. The S-50 is specifically designed for application operations requiring more powerful cutting.

The intensifier's electrical control panel, motor controls and PLC are replaced with an interface wiring junction box, allowing the system builder to supply all power, control and logic interface to the intensifier from the motion control panel. The entire waterjet cutting system can then be operated and controlled from one convenient location.

S-30 & S-50 Features

Other than the control panel, the S-30 & S-50 include the same industry leading features of the Streamline™ SL-V intensifiers. In addition, the S-50 comes standard with booster pump and filter.

Faster, Easier Maintenance

The plungers have a quick release. This design simplifies removal and allows instant removal of the plunger.

Lower Cost, Longer Life

This pump utilizes a larger ceramic plunger. The longer, slower strokes of the plunger move more water with each stroke, providing more uptime and longer seal life. A longer life seal design provides reliable and improved production volumes and delivers a lower operating cost than on any other type of pump.

Faster Cut, Thicker Material

Continuous production of 60,000 psi allows for faster cutting and thicker material.

Most Intelligently Designed System

End caps, high pressure cylinder and hydraulic cylinder are all threaded together, simplifying access to the seals. In addition, each side of the intensifier can be disassembled independently of the other.


Excellent Value

With the capabilities of the PLUS-series in an economical package cost, this product is of great value to the end user.

The KMT Waterjet Family of Products

The Streamline™ S-30 & S-50 were designed as part of the complete KMT Waterjet cutting system. Other products include the Streamline™ SL-V PLUS Series pumps, cutting head valves, diamond orifices and the top-performing, industry-leading Autoline™ II & IDE™ abrasive cutting heads.

Please call to discuss your applications or to receive more information on any high pressure component. KMT Waterjet has a network of trained and certified technicians available to provide "Cutting Edge Solutions".

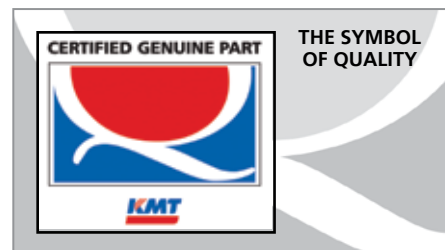

System Information	S-30	S-50
Nominal Power Rate	30hp (22kW)	50hp (37kW)
Maximum Continuous Pressure	60,000psi (4,137bar)	60,000psi (4,137bar)
Maximum Water Flow Rate @ Maximum Pressure	0.52 gpm (1.97 lpm)	0.88 gpm (3.3 lpm)
Maximum Single Orifice Diameter	0.010" (0.25 mm)	0.014" (0.35 mm)
Number of Language Options on Display	NA	OK
Control Voltage & Power Supply	Must be supplied: 24V DC	Must be supplied: 24V DC
Maximum Noise Level	NA	NA
Ambient Operating Temperature	Min.40°F (5°C); Max.104°F (40°C)	Min.40°F (5°C); Max.104°F (40°C)
Length	44" (1,118 mm)	84.25 (2,140 mm)
Width	37" (940 mm)	39.00 (991 mm)
Height	36" (914 mm)	44.88 (1,140 mm)
Weight	2,101 lbs. (953 kg)	3,100 lbs. (1,406 kg)
Cutting Water		
Minimum Inlet Cutting Water Flow	2.5 gpm (9.5 lpm)	3.5 gpm (13.2 lpm)
Minimum Inlet Cutting Water Pressure	35 psi (2.4 bar) flowing	35 psi (2.4 bar) flowing
Plunger Diameter	0.875" (22.2mm)	0.875" (22.2mm)
Maximum Nominal Stroke per Minute	34 (at 52,000 psi, 3,600 bar)	54 (at 55,000 psi, 3,793 bar)
Accumulator Volume	0.25 gal (0.96 L)	0.25 gal (0.96 L)
Hydraulic System		
Maximum Hydraulic Pressure (operating at max water pressure)	3,000 psi (207 bar)	3,000 psi (207 bar)
Hydraulic Reservoir Capacity	28 gal (106 L)	40 gal (151 L)
Cooling System		
Cooling Water Consumption @ 75°F (24°C) Water Temperature	2.5 gpm (9.5 lpm)	3.0 gpm (11.4 lpm)
Minimum Cooling Water Pressure	35 psi (2.4 bar)	35 psi (2.4 bar)
Options & Other Features		
Booster Pump with filter (adjustable & protected)	Optional	Standard
Wye-Delta Starter	NA	NA
Oil / Air-Cooler	Optional	Optional
Dual Pressure Compensator	Included	Included
Proportional Control	Optional	Optional
Remote Online Diagnostics (via Modem)	NA	NA
EQUALIZER Networking Kit Compatible	NA	NA

Standard Equipment

- Variable displacement, pressure compensated hydraulic pump
- High efficiency heat exchanger in the recirculation pump circuit
- Dual pressure control
- Hydraulic safety shutdown for low oil level and high oil temperature
- Unique leak detection sensing capability

Summary of Features

Easier to Maintain

The quick release feature of the plungers allows for easy maintenance, and the threaded cylinder design allows faster maintenance.

Faster Cutting

60,000 psi is continuously generated allowing for faster cutting and thicker material.

Longer Seal Life

The high pressure plungers use hydraulic power to achieve slower stroke rates, extending seal life.

Lower Cost

The longer lasting seal design delivers a lower operating cost than on any other type of pump.

Flexibility

Compact design allows for easy integration into table systems.



KMT Waterjet Systems Inc.

635 W. 12th Street • P.O. Box 231 • Baxter Springs, KS 66713
 Tel.: 1-620-856-2151 • Fax: 1-620-856-5050
www.kmtwaterjet.com • sales@kmtwaterjet.com